


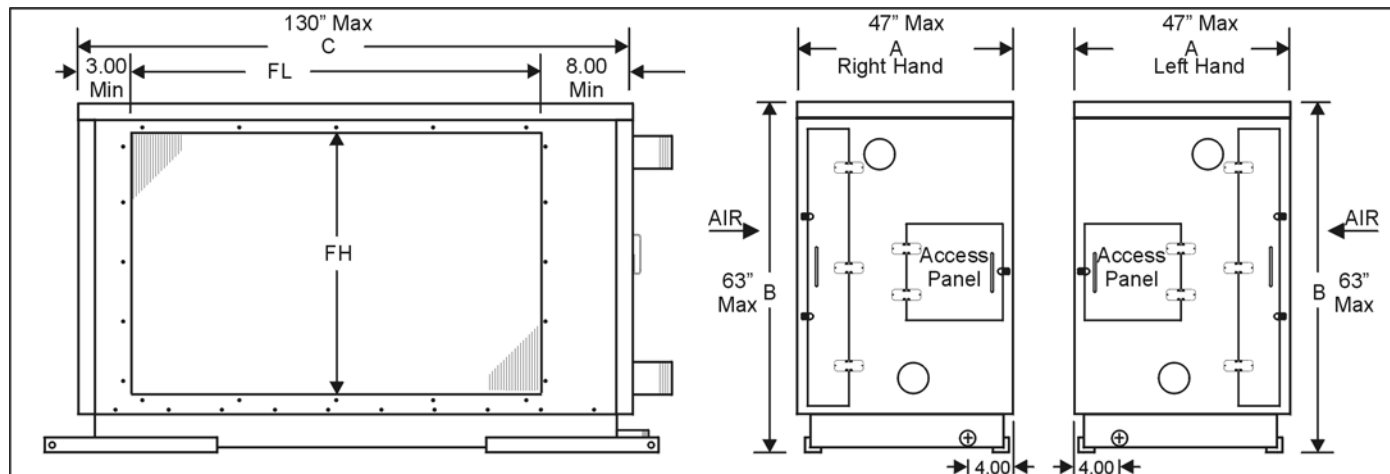

Cabinet Construction:

.138 GALV. Base Frame
.058 GALV. Side Panels
.058 GALV. Top Panel
.058 GALV. Front Panel
.058 GALV. Back Panel
.060 SSTL. Drain Pan

GENERAL INFORMATION:

Coil Model: Cooling _____

Heating _____

Hand _____

Qty. _____

Filter Width _____ (2" is standard)
(Internal Rack Only)

Filter Length _____

Filter Height _____

OPTIONAL FEATURES:

- ☐ 304 SSTL. Casing
- ☐ Double Wall Construction
- ☐ Internal Filter Rack With Hinged Access Door.
- ☐ Split Back Panel For Coil Removal
- ☐ External Vent & Drain Extended

Notes:

1. 12"X12" Access Panel Unless Otherwise Specified.
2. Coils Shown with Optional Internal Filter Rack.
3. All Seams Sealed With .500X.125 Insulating Strips and Silicon.
4. All Panels Constructed With .750 Microlite Insulation.
5. 1/4 " – 20 HEX Head Screws With Rubber Washers Used For Cabinet Construction.
6. Label Kit Provided.
7. Drain pan dual sloped toward drain

	A	B	C	Drain
3" Base				1.00"
5" Base				1.25"

M.A.R.C. Field Specification Sheet
CP 1195-D