

Customer _____ Customer P.O. Number _____

Job _____

Written by _____ Date _____

Approved by _____ Date _____

#	TAG	QTY	MODEL NUMBER						FIG#	CASING
			TYPE	FPI	ROWS DEEP	FIN	FH	FL		
1										
2										
3										
4										

#	DIMENSIONAL DATA										
	CONNECTION								FLANGES		
	SIZE	A	C	E	H	I	L	M	R	S	T
1											
2											
3											
4											


GENERAL OPTIONS	
☐	Label Kit
☐	Mounting Holes
☐	Phenolic Coating
☐	0.125" Dole Vent & Drain

CONN. OPTIONS	
☐	FPT
☐	0.75"
☐	1"


MATERIALS OF CONSTRUCTION				
FINS	AL	CU	CS	St Stl
TUBES	CU	CuNi	CS	St Stl

MATERIALS OF CONSTRUCTION				
CONN	Cu	Sweat	CS	St Stl Wrot Cu
CASING	AL	Galvanized Steel		
	CU	Stainless Steel		


REMARKS:

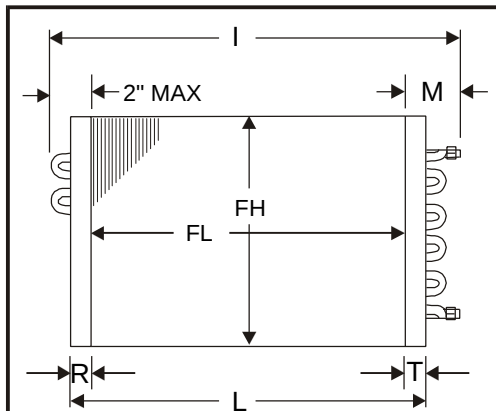

END PLATES ONLY

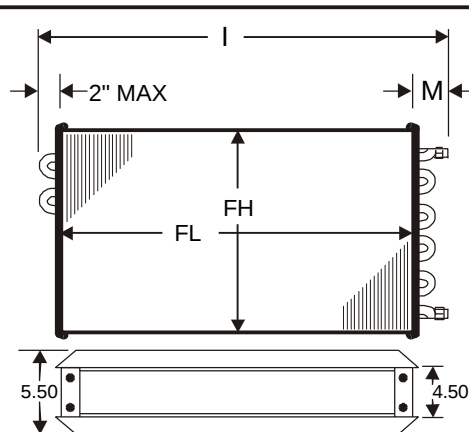

SLIP & DRIVE CASING

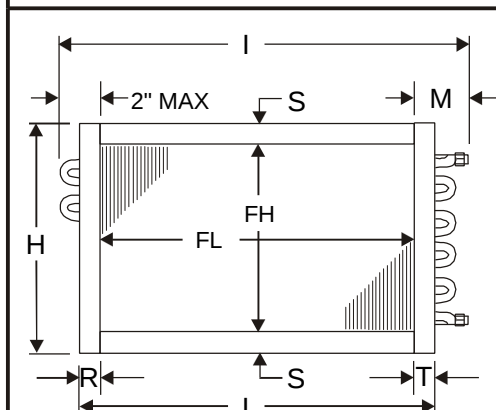

FULLY FLANGED

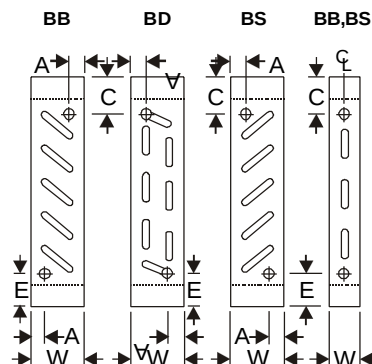


Fig. 1 Fig. 2 Fig. 3 Fig. 4

GENERAL NOTES

1. Mounting holes are optional for Fully Flanged and End Plates Only. 0.375" diameter holes on 6" centers from the centerline of the fin height and finned length are typical for all flanges. Not available when S < 0.75".
2. All dimensions are in inches.
3. The water should enter the coil through the lower connection for proper fluid flow.
4. Intermediate tube supports are fabricated from heavy gauge stock and supplied per the chart below.

Finned Length (FL)	Tube Supports
≤ 48	0
> 48 ≤ 96	1