

Customer _____ Customer P.O. Number _____

Job _____

Written by _____ Date _____

Approved by _____ Date _____

#	TAG	QTY	MODEL NUMBER						HAND Left Right
			TYPE	FPI	ROWS DEEP	FIN	FH	FL	
1									
2									
3									
4									

GENERAL OPTIONS	
☐	Label Kit
☐	Mounting Holes
☐	Phenolic Coating

MATERIALS OF CONSTRUCTION	
FINS	AL CU CS St Stl
Fin Thick	
TUBES	CU CuNi CS St Stl
Tube Size	
HEADERS	CU CuNi CS St Stl
CONN	CS Cu Sweat Red Brass St Stl
CASING	AL CU Galv Stl St Stl

#	DIMENSIONAL DATA											
	CONNECTION			H	J	L	M	FLANGES			W	FIG#
	SIZE	A	E					R	S	T		
1												
2												
3												
4												

REMARKS:

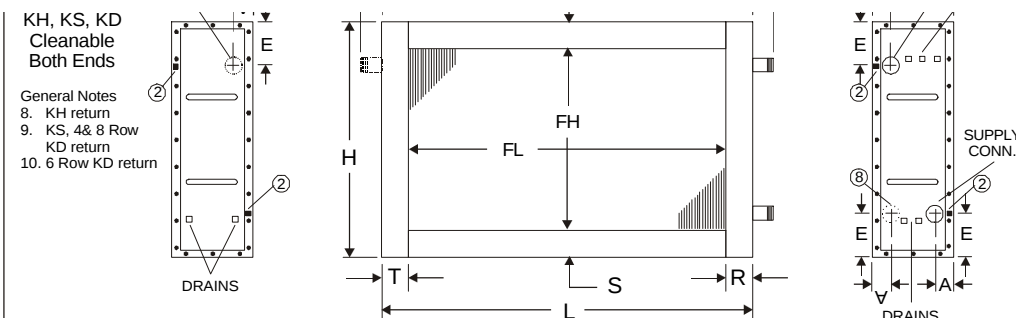


Figure 2


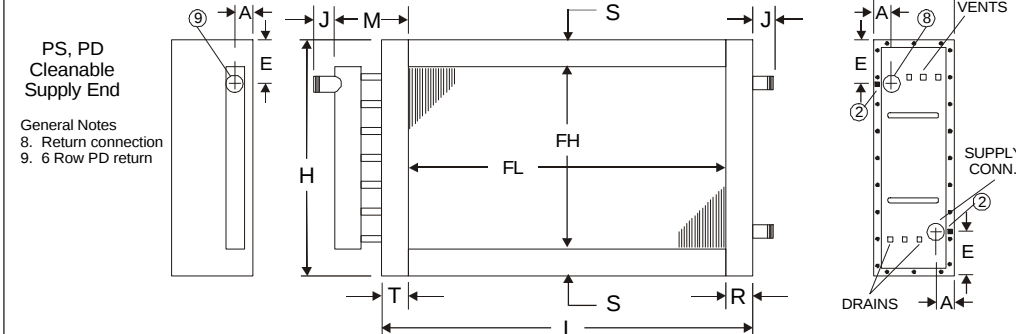


Figure 3

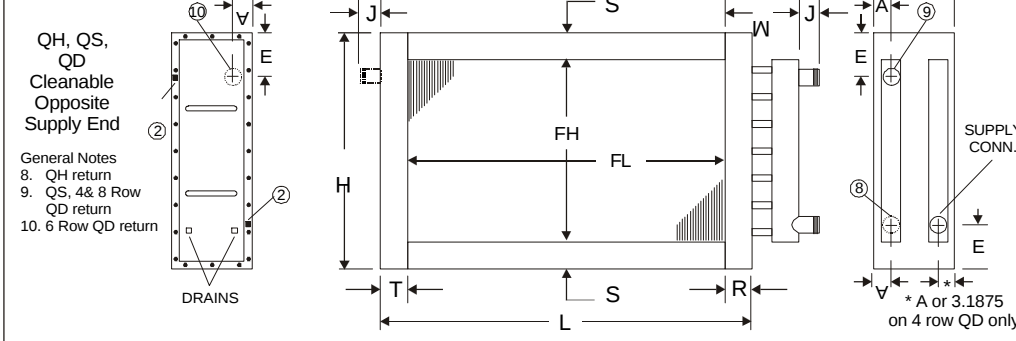

GENERAL NOTES

1. Mounting holes are optional. 0.375" diameter holes on 6" centers from the centerline of the fin height and finned length are typical for all flanges. Not available when $S < 1"$.
2. Jackscrews are provided to facilitate head removal.
3. All dimensions are in inches.
4. The supply line should be connected to the lower connection on the leaving air side for counterflow operation.
5. 1" wide reinforcement bars may extend past flanges.
6. Phenolic coated coils require a longer lead-time since they must be re-tested after coating.
7. Intermediate tube supports are fabricated from heavy gauge stock and supplied per the chart to the below.

Finned Length (FL)	Tube Supports
≤ 48	0
$> 48 \leq 96$	1
$> 96 \leq 144$	2
> 144	4

* A or 3.1875
on 4 row QD only